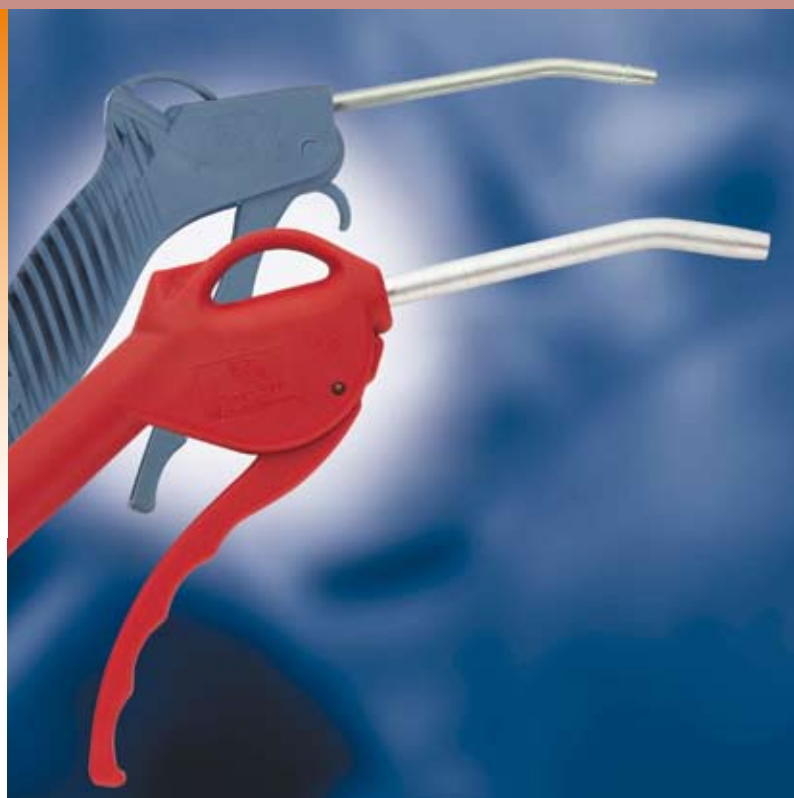


# Blow-Gun Technology



**Short nozzle**  
Directed air jet. Ideal for blowing out blind holes and workpieces.

**Safety nozzle**  
With center bore and lateral annular gap. In blowing operation, a protective shield is formed against rebounding shavings. The noise level is also significantly reduced. When the center bore is held closed, the air escapes through the annular gap.

**Extension pipe**  
Made of aluminium, therefore rustproof. For blowing out deep holes and in inaccessible locations.

**Protective shield**  
Is mounted behind the nozzle being used. Prevents shavings from rebounding.

**Venturi nozzle**  
Saves energy, since 2/3 of the surrounding air is sucked in thanks to the Venturi principle. Wide blow-out effect thanks to the large nozzle effect. When the nozzle hole is held closed, the air escapes through the lateral holes.

**Nozzle with sintered metal insert**  
Low noise level (63-73 dB (A)) yet with exceedingly good blow-out performance (up to 380 l/min).

## AJ 13-Set

## RECTUS Blow-Guns

Connection	Extension Tube	Part Number	DS
G 1/4 i.	6 mm bent	AJ 13/06 SET	■
G 1/4 i.	8 mm bent	AJ 13/08 SET	□
including 10 Blow-Guns AJ 13			

## AK 13-Set

## RECTUS Blow-Guns

Connection	Part Number	DS
G 1/4 i.	AK 13 SET	■
including 10 Blow-Guns AK 13		

DS = Delivery Status: ■ in stock □ on short call □ medium term delivery

## Blow-Gun

## RECTUS Blow-Guns

Connection	Part Number	DS
G 1/4 i.	AA 13	■
6 mm	AA 06 TF	■
9 mm	AA 09 TF	■
Plug 21 Series	AA 21 SF	□
Plug 26 Series	AA 26 SF	■
made of aluminium, with standard nozzle		

## Blow-Gun

## RECTUS Blow-Guns

Connection	Part Number	DS
G 1/4 i.	AS 13	■
6 mm	AS 06 TF	□
9 mm	AS 09 TF	□
Plug 21 Series	AS 21 SF	□
Plug 26 Series	AS 26 SF	□
made of aluminium, with safety nozzle		

## Blow-Gun

## RECTUS Blow-Guns

Connection	Part Number	DS
G 1/4 i.	AR 13	■
made of aluminium, with sintered metal insert		

## Blow-Gun


## RECTUS Blow-Guns

Connection	Part Number	DS
G 1/4 i.	AV 13	■
6 mm	AV 06 TF	□
9 mm	AV 09 TF	■
Plug 21 Series	AV 21 SF	□
Plug 26 Series	AV 26 SF	■
made of aluminium, with extension tube		

DS = Delivery Status: ■ in stock □ on short call □ medium term delivery


## Blow-Gun

## RECTUS Blow-Guns

	Connection	Part Number	DS
	G 1/4 i.	AT 13	■
	6 mm	AT 06 TF	■□
	9 mm	AT 09 TF	■□
	Plug 21 Series	AT 21 SF	■□
	Plug 26 Series	AT 26 SF	■□
made of aluminium, with Venturi nozzle			


## Blow-Gun

## RECTUS Blow-Guns

	Connection	Part Number	DS
	1/4 i. NPSF	ASG-1	■
made of aluminium, lever operated with safety nozzle			


## Blow-Gun

## RECTUS Blow-Guns

	Connection	Part Number	DS
	G 1/4 i.	AN 13	■
	6 mm	AN 06 TF	■□
	9 mm	AN 09 TF	■□
	Plug 21 Series	AN 21 SF	■□
	Plug 26 Series	AN 26 SF	■□
made of impact resistant plastic with standard nozzle fixed nozzle, impossible to replace			

## Blow-Gun


## RECTUS Blow-Guns

	Connection	Part Number	DS
	G 1/4 i.	AL 13	■
	6 mm	AL 06 TF	■□
	9 mm	AL 09 TF	■□
	Plug 21 Series	AL 21 SF	■□
	Plug 26 Series	AL 26 SF	■□
made of impact resistant plastic with standard nozzle fixed nozzle, impossible to replace			

DS = Delivery Status: ■ in stock ■□ on short call □ medium term delivery


## Blow-Gun

## RECTUS Blow-Guns

	Connection	Part Number	DS
	G 1/4 i.	AF 13	■
made of impact resistant plastic with sintered metal insert			

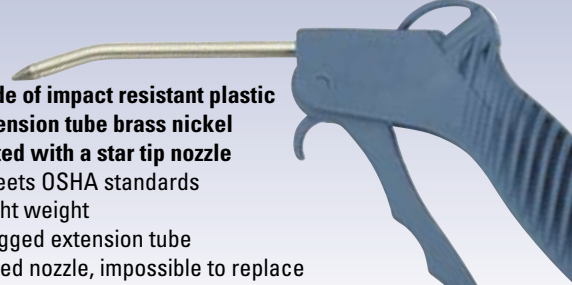
## Blow-Gun

## RECTUS Blow-Guns

	Connection	Part Number	DS
	G 1/4 i.	AK 13	■
	6 mm	AK 06 TF	■
	9 mm	AK 09 TF	■
	Plug 21 Series	AK 21 SF	■□
	Plug 26 Series	AK 26 SF	■
made of impact resistant plastic with aluminium extension tube fixed nozzle, impossible to replace			

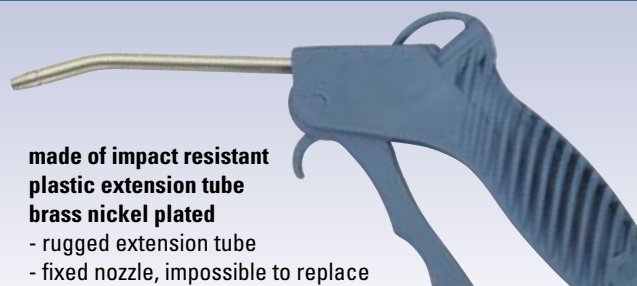
## Blow-Gun

## RECTUS Blow-Guns

	Connection	Part Number	DS
	G 1/4 i.	AZ 13	■
	Plug 26 Series	AZ 26 SF	■□
made of impact resistant plastic extension tube brass nickel plated with a star tip nozzle - meets OSHA standards - light weight - rugged extension tube - fixed nozzle, impossible to replace			

## Blow-Gun


## RECTUS Blow-Guns

	Connection	Part Number	DS
	G 1/4 i.	AC 13	■
	6 mm	AC 06 TF	■□
	9 mm	AC 09 TF	■□
	Plug 21 Series	AC 21 SF	■□
	Plug 26 Series	AC 26 SF	■□
made of impact resistant plastic extension tube brass nickel plated - rugged extension tube - fixed nozzle, impossible to replace			

DS = Delivery Status: ■ in stock ■□ on short call □ medium term delivery


## Blow-Gun

## RECTUS Blow-Guns

	Connection	Part Number	DS
 <p>made of impact resistant plastic with Venturi nozzle</p>	G 1/4 i.	AX 13	■


## Blow-Gun

## RECTUS Blow-Guns

	Connection	Part Number	DS
 <p>made of impact resistant plastic with R 1/8" i. without nozzle</p>	G 1/4 i.	AI 13	■


## Blow-Gun

## RECTUS Blow-Guns

	Connection	Part Number	DS
 <p>made of impact resistant plastic with M 12 x 1,25 IG without nozzle</p>	G 1/4 i.	AM 13	■

## Blow-Gun


## RECTUS Blow-Guns

	Connection	Extension tube	Part Number	DS
 <p>made of red impact resistant plastic with aluminium extension tube</p>	G 1/4 i.	6 mm bent	AJ 13/06 B	■
	G 1/4 i.	8 mm straight	AJ 13/08	■
	G 1/4 i.	8 mm bent	AJ 13/08 B	■
	G 1/4 i.	8 x 300 mm straight	AJ 13-300	■
	G 1/4 i.	8 x 500 mm straight	AJ 13-500	■
	G 1/4 i.	8 x 1000 mm straight	AJ 13-1000	■

DS = Delivery Status: ■ in stock □ on short call □ medium term delivery


## Standard Nozzle

## RECTUS Blow-Guns

	Connection	Part Number	DS
 <p>for blow-gun made of aluminium</p>	M 12 x 1,25	KD 12	■


## Safety Nozzle

## RECTUS Blow-Guns

	Connection	Part Number	DS
 <p>for blow-gun made of aluminium With center bore and lateral annular gap. In blowing operation a protection shield against kicking chips is formed, and noise level is clearly reduced. When the center bore is held locked, air escapes through the annular gap.</p>	M 12 x 1,25	SD 12	■


## Extension Tube, 150 mm long

## RECTUS Blow-Guns

	Connection	Part Number	DS
 <p>for blow-gun made of aluminium For blowing-out deep holes and blind spots</p>	M 12 x 1,25	VR 12	■

## Venturi-Nozzle


## RECTUS Blow-Guns

	Connection	Part Number	DS
 <p>Energy saving as 2/3 of environmental air is aspirated due to the Venturi principle. Wide blow-out effect due to high nozzle performance. When the center bore is held locked, air escapes through the lateral holes.</p>	M 12 x 1,25	AT 12	■

DS = Delivery Status: ■ in stock □ on short call □ medium term delivery


## Nozzle with sintered metal insert

## RECTUS Blow-Guns

	Connection	Part Number	DS
 <p>Low noise level (63-73 dB(A)), thus extremely good blowing effectivity (up to 380 l/min.)</p>	M 12 x 1,25	AR 12	■

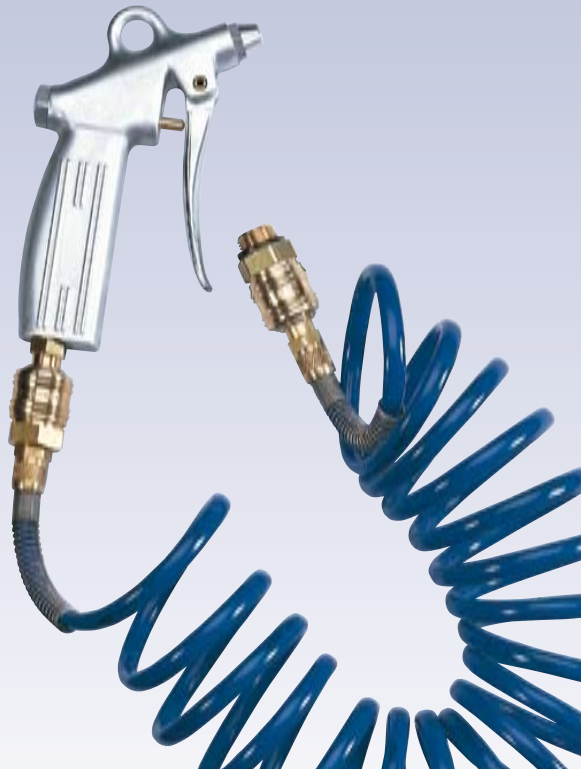
## Protective Shield

## RECTUS Blow-Guns

	Connection	Part Number	DS
		ST 12	■

## Blow-Gun Set

## RECTUS Blow-Guns

	Part Number	DS	
	with Blow-Gun made of Aluminium	SE 26 A	■
	with Blow-Gun made of impact resistant thermoplastic	SE 26 K	■

including

- Blow-Gun
- Hose 6 x 8 mm, length 2.5 m
- Couplings and plugs Series 26 (DN 7.2)

DS = Delivery Status:

■ in stock

■ on short call

■ medium term delivery



For the true heroes of today.



RECTUS is a RECTUS Group brand

